


Unlike conventional digital signage, the VM VERYBRIGHT delivers outstanding content, regardless of outdoor elements

Featuring 4 000 nits brightness and a high contrast ratio of 5 000:1, the **VM VERYBRIGHT** display remains bright and clear, delivering an uncompromised picture that will capture the attention of potential customers – even under the scrutiny of direct sunlight. In addition, blindness is removed when looking at the sign with polarized sunglasses.

For most retailers, energy efficiency is a must. It is a key component to controlling operational costs. It consumes less power than conventional displays while delivering a brilliant picture and spectacular performance. It is available in 46 and 55 inches. **VM VERYBRIGHT** is managed via the VM Live interface, accessible through any Internet-connected device.

Extremely easy to use, content on the **VM VERYBRIGHT** is managed thanks to the VM online interface, accessible through any Internet connected device.




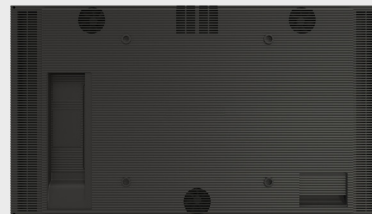


TECHNICAL SPECIFICATIONS

- Resolution 1920x1080 (16:9)
- 4 000 nits
- Polarized sunglasses compatible
- Video playback
- UV resistance
- VM Player & VM Live Compatible

Size	46"	55"
Brightness	4 000 nits	4 000 nits
Resolution	1920x1080 (16:9)	
Length	106,2 cm	125,34 cm
Width	61,66 cm	72,42 cm
Depth	5,45 cm	
VESA Mount	400 x 400 mm	
Weight	18,2 kg	23,1 kg
Power consumption	350 W	450 W
Operating T° (Direct sunlight)	0° - 30°C	
Operating T° (w/o Direct sunlight)	0° - 40°C	
Input video	HDMI 2.0 (2)	

REMARKABLE LIVE

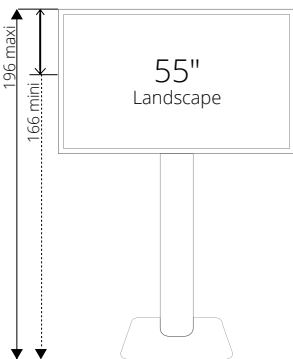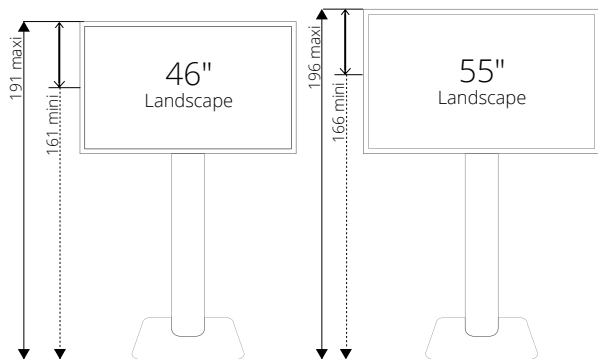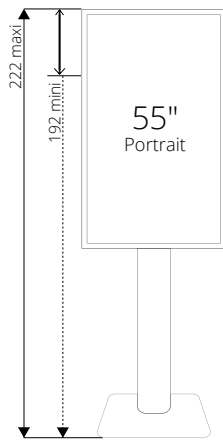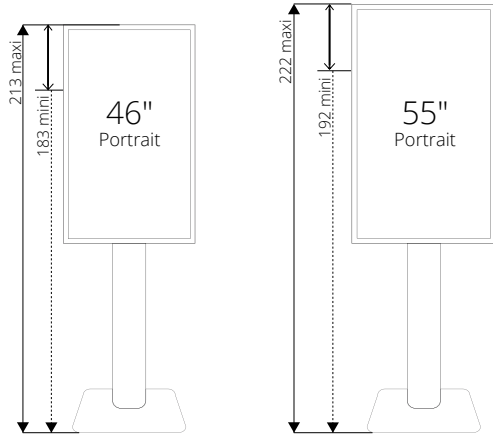

	MINI (cm)	MAXI (cm)
46" Portrait	183	213
46" Landscape	161	191
55" Portrait	192	222
55" Landscape	166	196

